

Electrification of medium- and heavy-duty road transportation increases grid flexibility requirements

Tamara Knittel, Colton Lowry, Peter Wild & Andrew Rowe

2024

Institute for Integrated Energy Systems (IESVic)

Energy Brief

© 2024 Knittel et al. This is an open access article distributed under the terms of the Creative Commons Attribution-NonCommercial 4.0 License:

<https://creativecommons.org/licenses/by-nc/4.0>

Original citation:

Knittel, T.; Lowry, C.; Wild, P.; Rowe, A. (2024) Electrification of medium- and heavy-duty road transportation in-creases grid flexibility requirements. *IESVic Energy Brief*.

Downloaded from UVicSpace Research & Learning Repository

dspace.library.uvic.ca



**University
of Victoria**

Libraries

The Institute for Integrated Energy Systems (IESVic) works on strategic clean technologies, electrification and system integration, built environment, energy-economy-policy modeling, and integrated planning for water-energy-land systems. IESVic provides leadership at the University of Victoria in the study of critical energy issues, human dimensions of energy, education and training, and works closely with industry, not-for-profits, and government.

The IESVic Energy Briefs Series shares research and practice on the development of sustainable energy systems that are reliable, cost-effective and socially acceptable.

Citation: Knittel, T.; Lowry, C.; wild, P.; Rowe, A. (2024) Electrification of medium- and heavy-duty road transportation increases grid flexibility requirements. *IESVic Energy Brief*.

Published: October 2, 2024

This publication, unless otherwise indicated, is released under a Creative Commons Attribution-NonCommercial 4.0 International (CC BY-NC 4.0) License.

ISSN 2818-159X (Print)

ISSN 2818-1603 (Online)

Electrification of medium- and heavy-duty road transportation increases grid flexibility requirements

Knittel, Tamara^{1*}, Lowry, Colton¹, Wild, Peter¹, Rowe, Andrew¹

¹ 2060 Group, University of Victoria, BC, Canada.

Correspondance: tamaraknittel@uvic.ca

Key messages

- Electrification of end-uses changes the shape of electricity demand.
- Shape of electricity demand drives electric grid infrastructure needs.
- Future ramping rates are driven by electrification of medium- and heavy-duty commercial vehicles.
- Electric vehicle charging control can limit capacity and flexibility requirements of the grid.

Importance: Electrification of medium- and heavy-duty transportation makes up 80% of future ramping rates

Electrification of end-use demands is among the most effective demand-side strategies to reduce greenhouse gas emissions (Davis et al., 2018; Williams et al., 2012). However, electrification of end-use demands may, itself, change the magnitude and shape (i.e. spatial and temporal profile) of electricity demand in ways that will stress current infrastructure. Examining the spatiotemporal profile of electricity demand after end-use electrification is therefore necessary to support electric utilities in planning for sufficient electrical capacity and system flexibility.

Historically, system planners have focused on peak capacity analyses and resource adequacy. However, the intermittency of variable renewable energy resources in combination with increased variability of electricity demand causes *grid flexibility* requirements to be a concern for system planners (Koltsaklis et al., 2017). Grid flexibility is the ability of the electricity system to balance supply and demand at short timescales (Lund et al., 2015). Having sufficient grid flexibility is key to the resilience and reliability of future electricity systems (Fridgen et al., 2020; Heffron et al., 2020).

To better understand the capacity and dynamic response requirements of future electricity grid operations, demand models with high spatial and temporal resolution are needed that capture individual end-use demands (Powell et al., 2022; Staffell et al., 2023). In this study, the Road Transportation Energy Simulator is used to generate electricity demand

profiles for individual vehicle weight classes (Lowry, 2023). Two transportation scenarios are simulated for the province of British Columbia (BC) in 2050 utilizing an immediate high power and an off-peak load leveling charging strategy¹, respectively.

Large-scale electrification of road transportation in BC will significantly increase grid flexibility requirements. For an immediate charging strategy, the model predicts positive and negative ramping rates in 2050 that are 1200% and 830%, respectively, higher than those in 2020 (Figure 1). The largest drivers of these higher ramping rates are electrified medium-duty (MD) and heavy-duty (HD) commercial vehicles which are responsible for 75% of these future ramping rates. Off-peak electric vehicle (EV) charging can mitigate increased ramping rates to some extent; however, positive ramping rates are still projected to increase fivefold, compared to historical ramping rates.

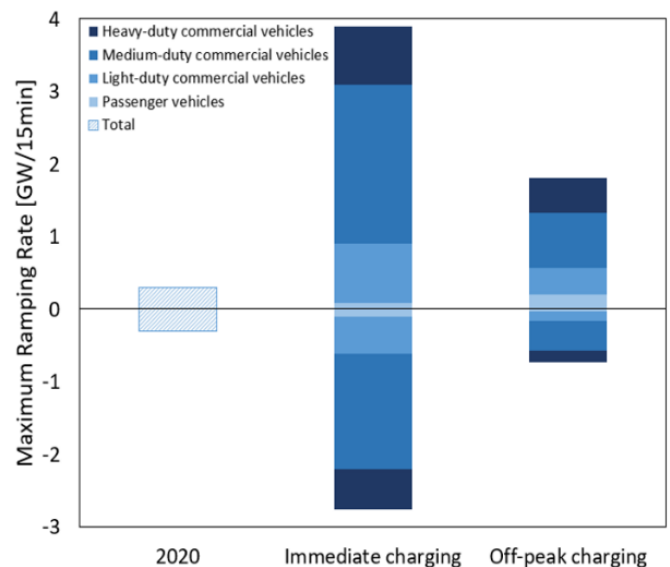


Figure 1: Maximum positive and negative system ramping rates by vehicle weight class in 2050 as compared to historical 2020 ramping rates.

¹ This work assumes that the number of vehicles will grow at the same rate that is projected for the population of BC, i.e., at a rate of 1.1% per year (Province of British Columbia, 2019). It is further assumed that 60% of medium- and heavy-duty commercial vehicles and all passenger vehicles and light-duty commercial vehicles will be electrified by 2050.

Opportunities and barriers: Other low carbon fuel technologies such as hydrogen for medium- and heavy-duty transportation may reduce grid flexibility requirements

Low carbon fuels may achieve emission reductions comparable to end-use electrification while significantly limiting the associated increase in ramping rates (Lowry, 2023; Palmer-Wilson et al., 2022). When using low carbon fuels for MD and HD road transportation, the increase in positive ramping rates would be limited to 87% in the case of off-peak EV charging (compared to an increase in positive ramping rates of 500% including MD and HD electrification). This significant reduction in positive ramping rates offers benefits to electricity systems such as decreased transmission and distribution requirements, better utilization of capacity, and increased reliability.

Next steps: Are there additional strategies to reduce grid flexibility requirements?

In the absence of low carbon fuels for commercial road transportation, increased end-use electrification will require expanding dispatchable generation capacity and transmission and distribution infrastructure. While energy storage can reduce imbalances in supply and demand, targeted strategies to reduce future grid capacity and flexibility requirements can be deployed in different end-use sectors. Among those are demand-side management strategies, such as EV charging and space heating control, which are, individually, projected to decrease both, capacity and flexibility requirements of the electricity grid (Knittel et al., 2023; Lowry, 2023). However, the feasibility and realizable benefit of combined utility-controlled EV charging and space heating control in cold climate regions such as BC are uncertain. Thus, accommodating decarbonization of road transportation end-use energy demands may require a synergy of strategies to limit the expansion of electricity grid infrastructure while simultaneously increasing the resilience of the electrical grid.

References

- Davis, S. J., Lewis, N. S., Shaner, M., Aggarwal, S., Arent, D., Azevedo, I. L., Benson, S. M., Bradley, T., Brouwer, J., Chiang, Y. M., Clack, C. T. M., Cohen, A., Doig, S., Edmonds, J., Fennell, P., Field, C. B., Hannegan, B., Hodge, B. M., Hoffert, M. I., ... Caldeira, K. (2018). Net-zero emissions energy systems. *Science*, *360*(6396). <https://doi.org/10.1126/science.aas9793>
- Fridgen, G., Keller, R., Körner, M. F., & Schöpf, M. (2020). A holistic view on sector coupling. *Energy Policy*, *147*. <https://doi.org/10.1016/j.enpol.2020.111913>
- Heffron, R., Körner, M. F., Wagner, J., Weibelzahl, M., & Fridgen, G. (2020). Industrial demand-side flexibility: A key element of a just energy transition and industrial development. *Applied Energy*, *269*, 115026. <https://doi.org/10.1016/j.apenergy.2020.115026>
- Knittel, T., Palmer-Wilson, K., McPherson, M., Wild, P., & Rowe, A. (2023). Heating electrification in cold climates: Invest in grid flexibility. *Applied Energy*, *356*, 122333. <https://doi.org/https://doi.org/10.1016/j.apenergy.2023.122333>
- Koltsaklis, N. E., Dagoumas, A. S., & Panapakidis, I. P. (2017). Impact of the penetration of renewables on flexibility needs. *Energy Policy*, *109*, 360–369. <https://doi.org/10.1016/j.enpol.2017.07.026>
- Lowry, C. (2023). *Muilti-Regional Simulation of Energy Demand for Road Transport: Electrification of Passenger, Light-, Medium-, and Heavy-duty Commercial Vehicles* [University of Victoria]. https://search.library.uvic.ca/discovery/fulldisplay?docid=alma9957759335907291&context=L&vid=01VIC_INST:01UVIC&lang=en&search_scope=MyInst_and_CI&adaptor=Local Search Engine&tab=LIBALL&query=any,contains,coltonlowry&offset=0
- Lund, P. D., Lindgren, J., Mikkola, J., & Salpakari, J. (2015). Review of energy system flexibility measures to enable high levels of variable renewable electricity. *Renewable and Sustainable Energy Reviews*, *45*, 785–807. <https://doi.org/10.1016/j.rser.2015.01.057>
- Palmer-Wilson, K., Bryant, T., Wild, P., & Rowe, A. (2022). Cost and capacity requirements of electrification or renewable gas transition options that decarbonize building heating in Metro Vancouver, British Columbia. *Energy Strategy Reviews*, *42*, 100882. <https://doi.org/10.1016/j.esr.2022.100882>
- Powell, S., Cezar, G. V., Min, L., Azevedo, I. M. L., & Rajagopal, R. (2022). Charging infrastructure access and operation to reduce the grid impacts of deep electric vehicle adoption. *Nature Energy*, *7*(10), 932–945. <https://doi.org/10.1038/s41560-022-01105-7>

Province of British Columbia. (2019). *PEOPLE 2020: BC Sub-Provincial Population Projections*.
https://www2.gov.bc.ca/assets/gov/data/statistics/people-population-community/population/people_population_projections_highlights.pdf

Staffell, I., Pfenninger, S., & Johnson, N. (2023). A global model of hourly space heating and cooling demand at multiple spatial scales. *Nature Energy*. <https://doi.org/10.1038/s41560-023-01341-5>

Williams, J. H., Debenedictis, A., Ghanadan, R., Mahone, A., Moore, J., Iii, W. R. M., Price, S., & Torn, M. S. (2012). The Technology Path to Deep Greenhouse Gas Emissions Cuts by 2050: The Pivotal Role of Electricity. *Science*, *335*, 53–59.